




P.C.B TERMINAL POSITION

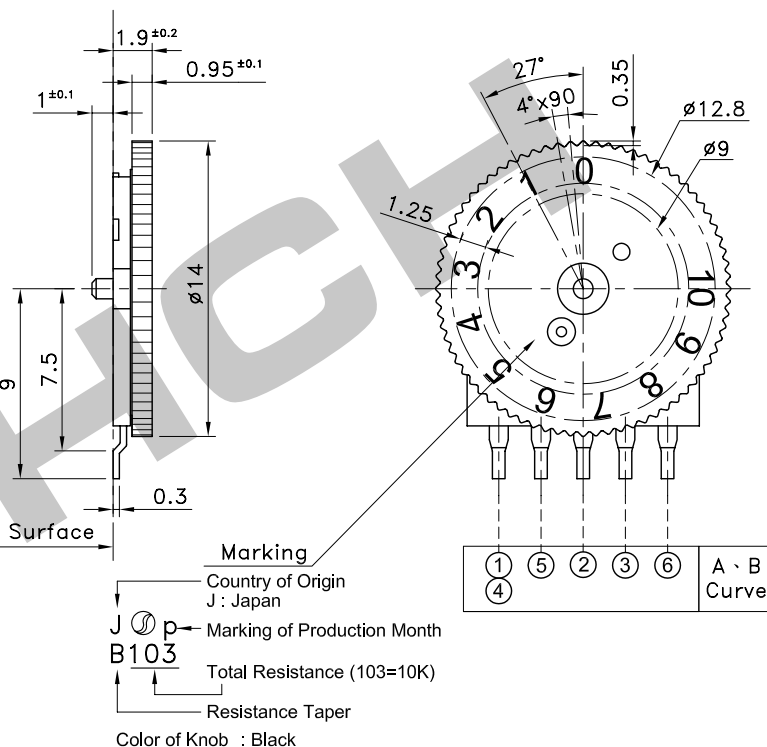


CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS



SPECIFICATIONS

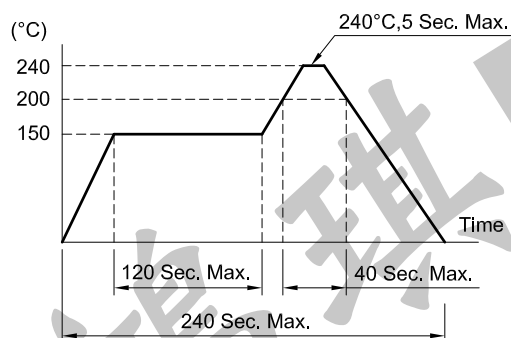

- | | |
|---------------------------------|--|
| 1. Rated Power | : 0.05W |
| 2. Max. Rated Voltage | : AC/DC 10V |
| 3. Total Resistance Range | : 5K~500KΩ ±30% |
| 4. Insulation Resistance | : 100MΩ Min. at DC 100V |
| 5. Dielectric Strength | : AC 100V for 1 Minute |
| 6. Rotational Noise | : 100mV Max. |
| 7. Resistance Taper | : A,B Curve |
| 8. Total Rotational Angle | : 270°±5° |
| 9. Rotational Torque | : 5.1~102gf • cm |
| 10. Knob Deflection | : 0.4 mmp-p Max. |
| 11. Knob Wobble | : 0.4x(∅/14) mm p-p Max.
(∅ : Diameter of the knob) |
| 12. Life | : 10,000 Cycles |
| 13. Taping | : 800 Pcs/Reel |
| 14. Operating Temperature Range | : -25~+70°C |

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1486	
ISSUED		CONFIRMED		<div><div><div>HCH</div><div>ISO9001 Certified</div><div>ISO14001 Certified</div></div><div>HORNG CHIH</div><div>鴻琪股份有限公司</div></div>		PART NO.	
John		Elvis				RVR14H-012A	
2009.03.31		2009.03.31					